



AVK FLANGED
BEND 90°, PN 10/16

712/0610-001



AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.



Product description:

Double flanged bend 90° type FFQ to EN 545 for water, waste water and neutral liquids to max. 70° C

Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16




Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.



Expect ... **AVK**

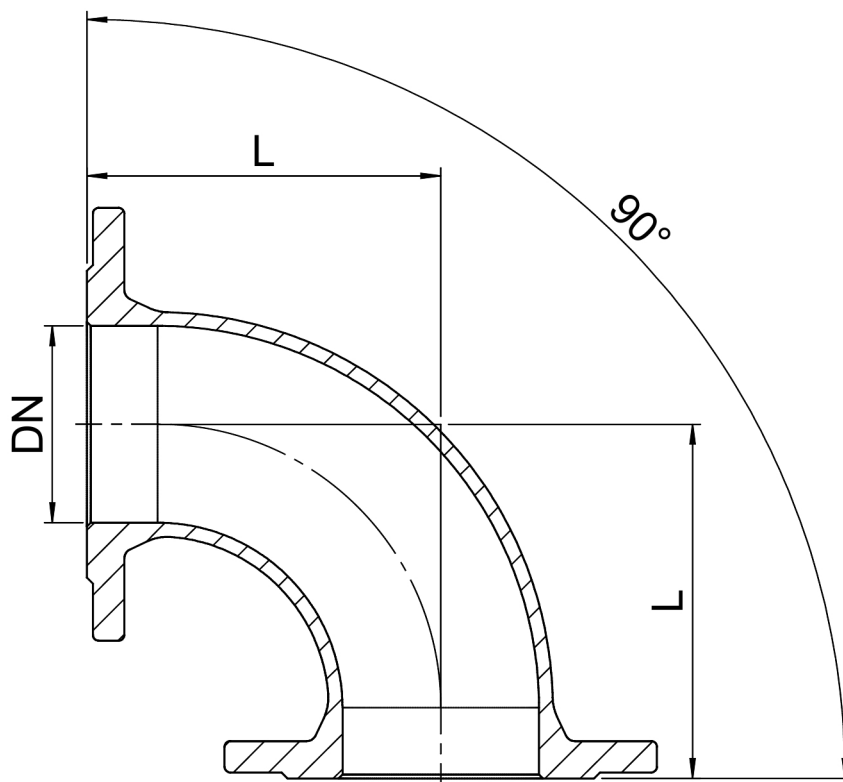

Component list:

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0040-06-101	40	PN10/16	140	6.1
712-0050-06-101	50	PN10/16	150	7.5
712-0065-06-101	65	PN10/16	165	9.5
712-0080-06-101	80	PN10/16	165	9.3
712-0100-06-101	100	PN10/16	180	12
712-0125-06-101	125	PN10/16	200	18
712-0150-06-101	150	PN10/16	220	19
712-0200-06-100	200	PN10	260	28
712-0200-06-101	200	PN16	260	28
712-0250-06-100	250	PN10	350	45
712-0250-06-101	250	PN16	350	45
712-0300-06-100	300	PN10	400	64
712-0300-06-101	300	PN16	400	64
712-0350-06-100	350	PN10	450	113
712-0350-06-101	350	PN16	450	113
712-0400-06-100	400	PN10	500	148
712-0400-06-101	400	PN16	500	148
712-0500-06-100	500	PN10	600	248
712-0500-06-101	500	PN16	600	248
712-0600-06-100	600	PN10	700	381
712-0600-06-101	600	PN16	700	381