



AVK FLANGED PIPE

500 MM, PN10/16

712/4810-001



AVK's range of fittings comprises a wide selection of variants with socket, tyton and flange connection. The fittings are made of ductile iron min. GJS-400 (GGG-40) and are epoxy coated according to DIN 30677-2 and GSK specifications - internally and externally.



Product description:

Double flange pipe type FF for water, waste water and neutral liquids to max. 70° C


Standards:

- Designed according to EN 545
- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 10/16




Features:

- Ductile iron fitting to EN 545.
- Body of min. GJS-400-15 (GGG-40).
- Epoxy coated to DIN 30677-2 and GSK guidelines internally and externally.

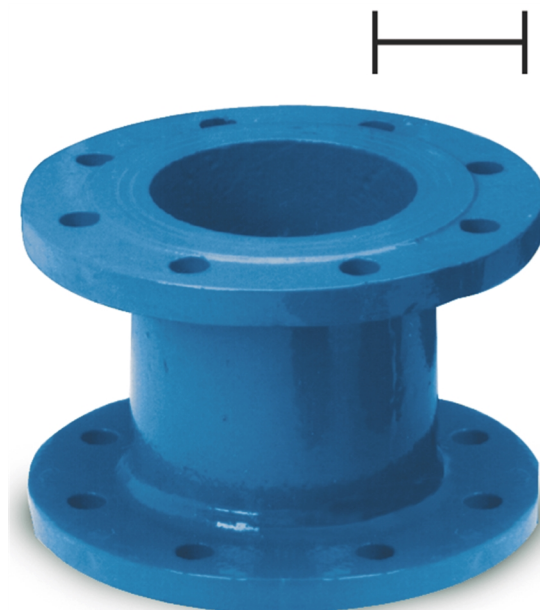

Expect ... **AVK**

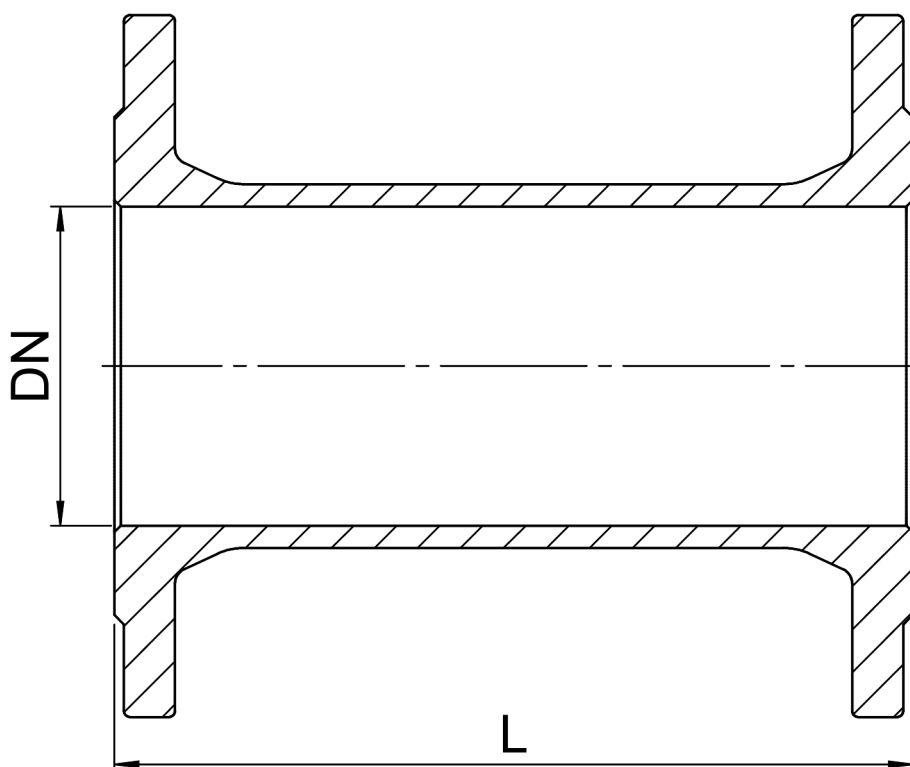

Component list:

1. Fitting	Ductile iron
------------	--------------

Components may be substituted with equivalent or higher class materials without prior notification.

Reference nos. and dimensions:

AVK ref. no.	DN mm	Flange drilling	L mm	Theoretical weight / kg
712-0050-48-101	50	PN10/16	500	10.0
712-0065-48-101	65	PN10/16	500	12
712-0080-48-101	80	PN10/16	500	14
712-0100-48-101	100	PN10/16	500	17
712-0125-48-101	125	PN10/16	500	20
712-0150-48-101	150	PN10/16	500	26
712-0200-48-100	200	PN10	500	34
712-0200-48-101	200	PN16	500	34
712-0250-48-100	250	PN10	500	50
712-0250-48-101	250	PN16	500	50
712-0300-48-100	300	PN10	500	65
712-0300-48-101	300	PN16	500	65
712-0350-48-100	350	PN10	500	90
712-0350-48-101	350	PN16	500	90
712-0400-48-100	400	PN10	500	112
712-0400-48-101	400	PN16	500	112
712-0450-48-100	450	PN10	500	146
712-0450-48-101	450	PN16	500	146
712-0500-48-100	500	PN10	500	171
712-0500-48-101	500	PN16	500	171
712-0600-48-100	600	PN10	500	244
712-0600-48-101	600	PN16	500	244