



AVK BALL FLOAT VALVE, PN16

854/00-001

DN50-300, with lever and float

The AVK Series 854 are ball float valves designed to be fitted in the top of a tank or reservoir to automatically control the rate of filling and shut off completely when a predetermined level is reached. The balanced equilibrium design makes sure that operation is smooth and reliable.

Product description:

Balanced equilibrium float valve for water and other neutral liquids to max. 70°C. Maximum Working Pressure: 16 bar.

Standards:

- Standard flange drilling to EN1092-2 (ISO 7005-2), PN 16

Test/Approvals:

- Hydraulic test according to EN 1074-1 and 2 / EN 12266
- Seat: 1.1 x PN. Body: 1.5 x PN.
- Approved according to WRAS up to 60°C

Features:

- Right angled design.
- Long actuating lever for slow closure.
- Flanged outlet for fitting of downpipe.
- Drop tight shut off.
- Fully removeable bronze cylinder.
- Easily maintained.
- Float in control of valve at all positions of travel.
- Face and piston seals easily replaceable.
- Float position adjustable in horizontal plane.

Accessories:

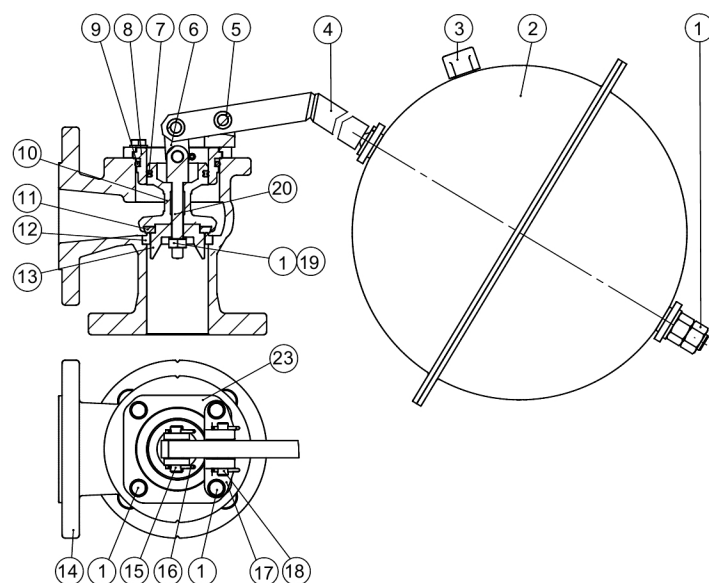
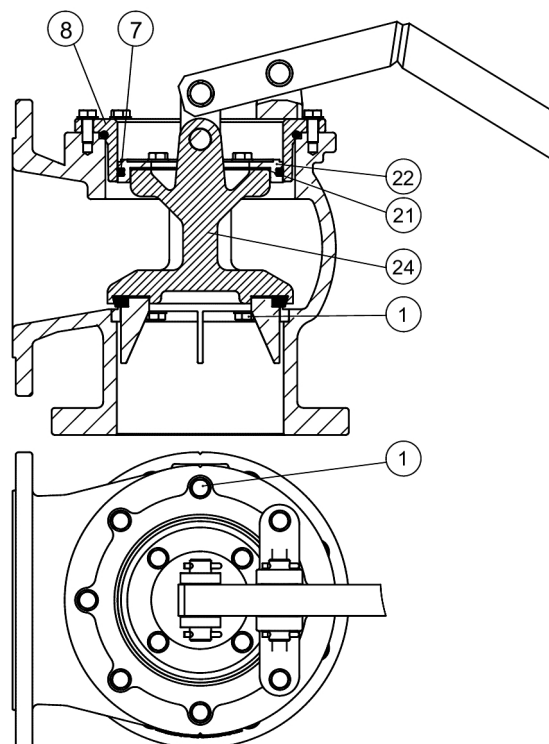
Alternative flange drillings, Vertical float rod arrangementl



Expect... **AVK**

The designs, materials and specifications shown are subject to change without notice due to the continuous development of our product range.

COPYRIGHT©AVK GROUP 2017


DN50-100

DN150-300
Component list:

1. Bolt/nut	Stainless steel A2	13. Valve guide	Bronze CC499K
2. Float	PP	14. Body	Ductile iron GJS-500-7 (GGG-50)
3. Filler cap	PP	15. Hinge pin	Stainless steel 1.4301
4. Float lever	Steel, hot dip galvanized	16. Split pin	Copper
5. Bearing	Bronze	17. Fulcrum bracket	Ductile iron GJS-500-7 (GGG-50)
6. Link	Steel, hot dip galvanized	18. Fulcrum pin	Stainless steel 1.4301
7. DN50-200: lip ring, DN250-300: O-Ring	NBR rubber	19. Washer	Stainless steel A4
8. Cylinder	Brass, DZR CW602N	20. Piston bolt	Stainless steel 1.4305
9. O-ring	EPDM rubber	21. Gasket	NBR rubber
10. Valve centre	Bronze CC499K	22. Valve piston	Bronze CC499K
11. Seal ring	EPDM rubber	23. Flange	Carbon steel
12. Seat ring	Bronze CC499K	24. Valve centre	Ductile iron GJS-500-7 (GGG-50)

Components may be substituted with equivalent or higher class materials without prior notification.

* Item 8 DN150-300: Bronze CC499K

Reference nos. and dimensions:

AVK ref. no.	DN	A	B	C	D	E	F	G	Max recommended discharge	Theoretical weight / kg
	mm	mm	mm	mm	mm	mm	mm	mm	l/sec	
854-050-00-1001	50	110	110	700	260	170	310	150	6	16
854-080-00-1001	80	130	145	850	300	250	410	170	14	22
854-100-00-1001	100	140	160	1000	380	330	410	240	25	33
854-150-00-1001	150	180	210	1250	470	480	460	290	55	66
854-200-00-1001	200	220	270	1500	570	650	460	350	97	118
854-250-00-1001	250	250	330	1800	650	810	560	400	152	184
854-300-00-1001	300	300	380	2200	750	930	560	450	220	260

